

ViewSonic® LCD DISPLAY

VX2718-2KPC-MHD


Key Features

- 165Hz refresh rate delivers fluid, tear-free visuals
- Rapid 1ms (MPRT) response time for crisp movements
- QHD 1440p resolution
- 1500R curved screen for a perfect balance of immersion and comfort
- Flexible connectivity with dual HDMI and DisplayPort input



Product Description

Designed with an immersive 1500R curved and borderless panel, the ViewSonic VX2718-2KPC-MHD provides a stunning viewing experience. A high 165Hz refresh rate delivers smooth animations with minimal input lag while Adaptive Sync virtually eliminates screen tearing and stuttering for fluid gaming. With 1ms MPRT response time, the monitor delivers unprecedented screen quality and speed. VX2718-2KPC-MHD is also equipped with ViewSonic's exclusive ViewMode™ presets, which offer optimised screen performance for different home entertainment applications, such as watching movies, editing, or playing video games. In addition, a DisplayPort and two HDMI inputs offer flexible connectivity for both general use and entertainment.

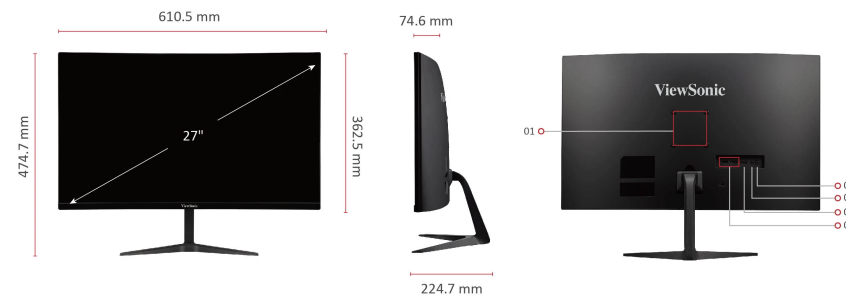

- 1. VESA Compatible(Wall Mount 100 x 100mm)
- 2. HDMI x 2
- 3. DP
- 4. Audio Out
- 5. DC In

Visit Us ■ www.viewsonic.com

DISPLAY		ADDITIONAL HARDWARE		GENERAL	
Display Size (in.):	27	Kensington Lock Slot:	1	Regulations:	cTUVus, FCC-B, ICES NOM, Mexico Energy, CB, RoHS, ErP, REACH, EAC, UkrSEPRO, UKRCM, KC, e-Standby
Viewable Area (in.):	27	CONTROLS			
Panel Type:	VA Technology	Physical Controls:	Key 1 (power), Key 2, Key 3, Key 4, Key 5 (favorite)	PACKAGE CONTENTS:	VX2718-2KPC-MHD x1 (IEC C13 / GEE22) x1, Cable (v1.2; Male-Male Adapter x1, Quick Star
Resolution:	2560 x 1440	On Screen Display:	Input Select, Audio Adjust, ViewMode, Colour Adjust, Manual Image Adjust, Setup Menu		
Resolution Type:	QHD	OPERATING CONDITIONS			
Static Contrast Ratio:	4,000:1 (typ)	Temperature:	32°F to 104°F (0°C to 40°C)	Warranty:	*Warranty offered may market to market
Dynamic Contrast Ratio:	80M:1	Humidity (non-condensing):	20% to 90%		
Light Source:	LED	WALL MOUNT			
Brightness:	250 cd/m ² (typ)	VESA Compatible:	75 x 75 mm		
Colours:	8 bit (6 bit + FRC)	INPUT SIGNAL			
Colour Space Support:	16:9	Frequency Horizontal:	HDMI (v2.0): 30 ~ 222KHz, DisplayPort (v1.2): 30 ~ 243KHz		
Aspect Ratio:	16:9	Frequency Vertical:	HDMI (v2.0): 48 ~ 144Hz, DisplayPort (v1.2): 48 ~ 165Hz		
Response Time (MPRT):	1ms	VIDEO INPUT			
Viewing Angles:	178° horizontal, 178° vertical	Digital Sync:	TMD5 - HDMI (v2.0), PCI-E - DisplayPort (v1.2)		
Backlight Life (Hours):	30000 Hrs (Min)	ERGONOMICS			
Curvature:	1500R	Tilt (Forward/Back):	-5° / 20°		
Refresh Rate (Hz):	165	WEIGHT (IMPERIAL)			
Adaptive Sync:	Yes	Net (lbs):	8.6		
Blue Light Filter:	Yes	Net Without Stand (lbs):	7.3		
Flicker-Free:	Yes	Gross (lbs):	12.1		
Colour Gamut:	NTSC: 72% size (Typ), sRGB: 102% size (Typ)	WEIGHT (METRIC)			
Pixel Size:	0.233 mm (H) x 0.233 mm (V)	Net (kg):	3.9		
Surface Treatment:	Anti-Glare, Hard Coating (3H)	Net Without Stand (kg):	3.3		
COMPATIBILITY		Gross (kg):	5.5		
PC Resolution (max):	2560x1440	DIMENSIONS (IMPERIAL) (WXHXD)			
Mac® Resolution (max):	2560x1440	Packaging (in.):	27 x 17.4 x 6.1		
PC Operating System:	Windows 10 certified; macOS tested	Physical (in.):	24 x 18.7 x 8.8		
Mac® Resolution (min):	2560x1440	Physical Without Stand (in.):	24 x 14.3 x 2.9		
CONNECTOR		DIMENSIONS (METRIC) (WXHXD)			
3.5mm Audio Out:	1	Packaging (mm):	687 x 443 x 156		
HDMI 2.0:	2	Physical (mm):	611 x 475 x 225		
Display Port:	1	Physical Without Stand (mm):	611 x 363 x 75		
Power in:	External power adapter				
AUDIO					
Internal Speakers:	2Watts x2				
POWER					
Voltage:	AC 100-240V, 50/60 Hz				
Stand-by:	0.5W				
Power Supply:	External				