


## Key **Features**

- Easily extend your content from laptops and mobile devices
- USB-C one-cable solution for audiovisual and power signal transmission
- Flexible display setup work at any angle
- Compact size, light weight, and highly portable
- Endurable one-piece design



## Product **Description**

The ViewSonic VA1655 is a portable 16" Full HD monitor perfect for overcoming one-screen limitations outside the office. Extend the screen from phones, tablets, or laptops for mobile work, one-on-one presentations, or leisureentertainment. The two universal USB Type C connectors provide a one-cable solution for audiovisual and power signaltransmission. The adjustable stand and pivot-able display will support your working angles.

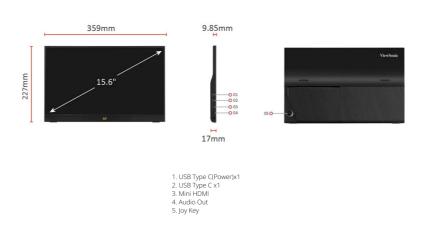

**Visit Us** 

www.viewsonic.com

DISPLAY		WEIGHT (IMPERIAL)	
Display Size (in.):	16	Net (lbs):	1.5
Viewable Area (in.):	15.6	Net Without Stand (lbs):	1.5
Panel Type:	IPS Technology	Gross (lbs):	3.7
Resolution:	1920 x 1080	WEIGHT (METRIC)	
Resolution Type:	FHD (Full HD)	Net (kg):	0.7
Static Contrast Ratio:	800:1 (typ)	Net Without Stand (kg):	0.7
Dynamic Contrast Ratio:	50M:1	Gross (kg):	1.7
Light Source:	LED	DIMENSIONS (IMPERIAL) (W	XHXD)
Brightness:	250 cd/m² (typ)	Packaging (in.):	17.1 x 15.4 x 3.5
Colors:	16.2M	Physical (in.):	14.1 x 8.9 x 0.7
Color Space Support:	8 bit (6 bit + FRC)	Physical Without Stand (in.):	14.1 x 8.9 x 0.7
Aspect Ratio:	16:9	DIMENSIONS (METRIC) (WXI	IXD)
Response Time (Typical GTG):	7ms	Packaging (mm):	434 x 391 x 88
Viewing Angles:	170° horizontal, 170° vertical	Physical (mm):	359 x 227 x 17
Backlight Life (Hours):	15000 Hrs (Min)	Physical Without Stand (mm):	359 x 227 x 17
Curvature:	Flat	GENERAL	
	60		cTUVus, FCC-B, ICES003, Energy
Refresh Rate (Hz): Blue Light Filter:	Yes	Regulations:	Star, EPEAT, CEC, NRCan, NOM, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, UKCA, BSMI, VCCI, PSE, BIS
Color Gamut:	NTSC: 45% size (Typ) sRGB: 64% size (Typ)		
Pixel Size:	0.179 mm (H) x 0.179 mm (V)	PACKAGE CONTENTS:	VA1655 x1, mini HDMI to HDMI Cable (v1.4; Male-Male) x1, USB Type-C Cable (Male-Male) x1, Quick Start Guide x1, Sleeve case x1
Surface Treatment:	Anti-Glare, Hard Coating (3H)		
COMPATIBILITY			Please dispose of in accordance with
PC Resolution (max):	1920x1080	Recycle/Disposal:	local, state or federal laws.
Mac® Resolution (max):	1920x1080	Warranty:	*Warranty offered may differ from market to market
PC Operating System:	Windows 10/11 certified; macOS	Country Of Origin:	144
Mac® Resolution (min):	tested 1920x1080	Power Management:	Energy Star standards, EPEAT
CONNECTOR	1920X1000	r oner management.	znorgy otal otaliaarao, zr zzn
USB 3.2 Type C DisplayPort Alt	4 (00)4		
mode only:	1 (60W power charger)		
3.5mm Audio Out:	1		
Mini HDMI:	1		
Power in:	USB Type C (power only)		
AUDIO			
Internal Speakers:	0.8Watts x2		
POWER			
Eco Mode (Conserve):	5.1W		
Eco Mode (optimized):	6W		
Consumption (typical):	7W		
Consumption (max):	7.3W		
Voltage:	DC 5V/9V/12V/15V/20V		
Stand-by:	0.3W		
Power Supply:	External (Optional)		
ADDITIONAL HARDWARE			
Kensington Lock Slot:	1		
CONTROLS			
Physical Controls:	Up, Right, Down, Left, Power		
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu		
OPERATING CONDITIONS			
Temperature:	32°F to 104°F (0°C to 40°C)		
Humidity (non-condensing):	20% to 90%		
INPUT SIGNAL			
Frequency Horizontal:	mini HDMI (v1.4): 15 ~ 82KHz, Type C: 24 ~ 82KHz		
Frequency Vertical:	mini HDMI (v1.4): 50 ~ 75Hz, Type C: 50 ~ 75Hz		
VIDEO INPUT			
Digital Sync:	TMDS - mini HDMI (v1.4), Micro- Packet - Type C		
ERGONOMICS			
Tilt (Forward/Back):	30° / 53°		